

WC FLUSH VALVE 828

828 39 04

BENKISER
ERFINDER SEIT 1909

WC FLUSH VALVE, THE CLASSIC

SPECIAL FEATURES


- WC-lever type flush valve with time adjustment
- Reduces water consumption
- Vandal proof full brass
- Full performance even at lowest pressures
- Flush time manually adjustable
- Full brass body , chromed surface, acc. to TrinkwV
- Easy installation
- All components exchangeable without disassembly
- Pistun cuff made of natural neat leather
- Incl. connection pipe

TECHNICAL DETAILS

- Operating pressure: 1.2-5.0 bar (17-72 PSI)
- Flushing volume from ca. 2 - 7 liters / flush
- Flushing time ca. 6 Sec. at 2 bar, pre-set, manual adjustment from 1 - 8 Sec.
- Connection 3/4"
- Surface: Chrome, acc. to DIN EN 248
- Brass and plastic parts acc. to UBA and KTW

MODELS AVAILABLE

- 828 39 04 : WC-Flush Valve 3/4" (DN 20) Manual Adjustment of Flushing Stream and Volume
- 828 12 04 : WC-Flush Valve 1/2" (DN 15) Manual Adjustment of Flushing Stream and Volume

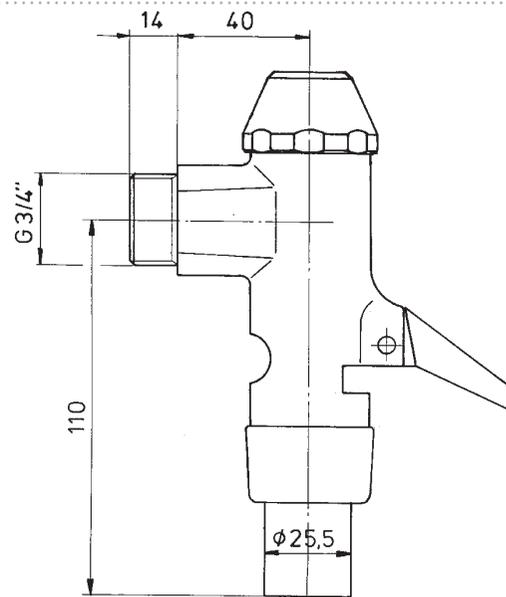

ADVANTAGES



WATER SAVING



FULL BRASS



EASY TO INSTALL



FLUSH TIME

Daimlerstraße 2,
D-93133 Burglengenfeld, Germany
Tel. +49 (0) 9471 / 600 93-0
Fax +49 (0) 9471 / 88 55
www.benkiser.de
info@benkiser.de